
MARO water pumps

SMALL SUBMERSIBLE PUMP


BEST

Overall dimension

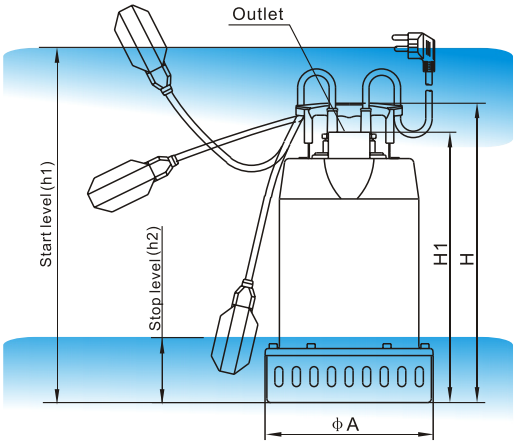

Model	H	H1	h1	h2	A
BEST ONE (MA)	273	231	340	80	167
BEST 2 (MA)	360	324	415	80	211
BEST 3 (MA)	360	324	415	80	211
BEST 4 (MA)	375	339	430	80	211
BEST 5 (MA)	375	339	430	80	211

Performance curves

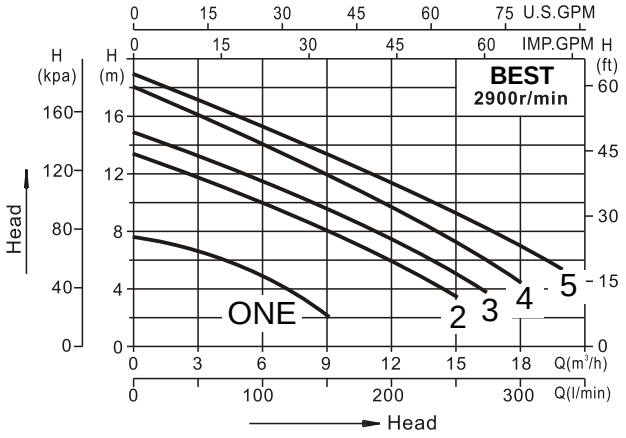



Features

1.Open impeller, suit to ⩽10mm solid particle.
2.Double shaft seal.
3.Hight temperatur bearing.
4.copper winding.
5.stainless steel housing.
6.with USA Ti thermal protector.

Technical parameter list

Model	Power(P_2) KW	(Amps) 220V/50Hz	Hmax (m)	Qmax (L/min)	Outlet	G.W (Kg)	Packing size (mm)
BEST ONE (MA)	0.25	1.9	8	170	G1.25"	5.5	215×185×325
BEST 2 (MA)	0.55	3.8	13.5	250	G1.5"	9.8	425×260×300
BEST 3 (MA)	0.75	5.2	14	280	G1.5"	10.5	405×260×300
BEST 4 (MA)	1.1	7.0	18	330	G1.5"	12	420×260×300
BEST 5 (MA)	1.5	9.2	19	360	G1.5"	13	420×260×300


Application

- Suitable for clean water, sea water.
- Farming, forestry, fishery water supply, circulation, and water changing ·
- Equipment for Gardening, Aquarium, Landscape waterfall, Water drainage and filtration ·

Working conditions

Medium temperature: 0~40℃
The diving depth should be less than: 5m

NO.	Name
1	The fixed clip of Cable
2	Cable head
3	Cable clamp
4	Cable
5	Press nut
6	Float switch
7	The fixed clip of Cable
8	Cable head
9	O-ring
10	Cross recessed pan head screws
11	Handle
12	Housing assembly
13	Hexagon socket head cap screw
14	O-ring
15	Capacitor cover
16	O-ring
17	Upper part of terminal box
18	Terminal
19	Cross recessed pan head screws

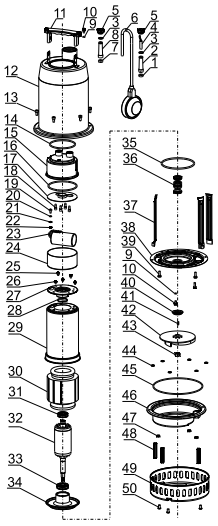

NO.	Name
20	Spring washer
21	Washer
22	Serrated lock washer external teeth
23	Capacitor
24	Bottom part of terminal box
25	Cross recessed pan head screw and washer assemblie
26	Cross recessed pan head screws
27	Back Cover
28	The three wave
29	Motor base
30	Rotor assembling
31	Bearing
32	Rotor assembling
33	Bearing
34	Front Cover
35	O-ring
36	Mechanical Seal
37	Tension rod
38	Pump Casing

NO.	Name
39	Cross recessed pan head screws
40	Protective cover
41	Key
42	Impeller
43	Hexagon Nut
44	Washer
45	O-ring
46	Pump casing
47	Hexagon Nut
48	Base connection block
49	Base
50	Cross recessed pan head screws