
MARO DISC DIFFUSER - LTD 270

Installation Drawing

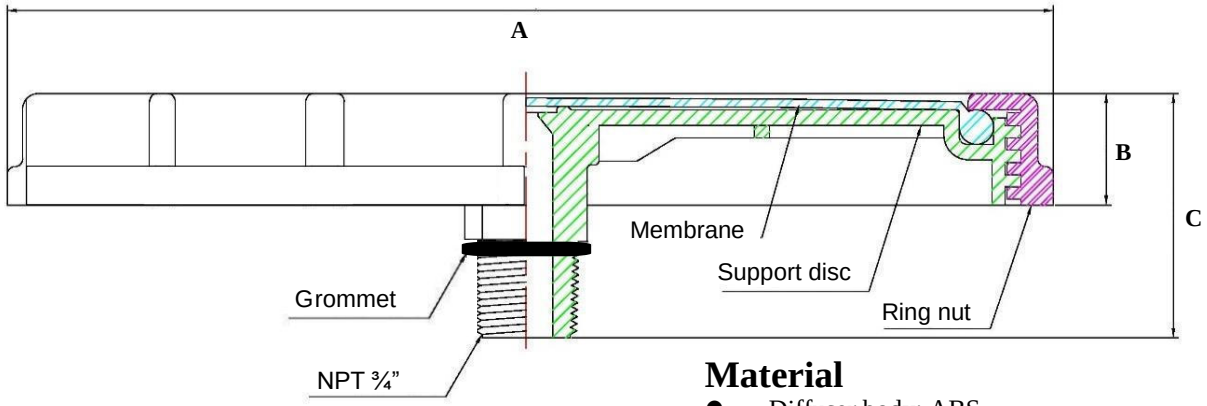

Material

- Diffuser body: ABS
- Flexible Membrane:EPDM
- Grommet: rubber

Dimensions

Height (**C**)	Diameter Total (**A**) / Effective	Mounting height (**B**)	Active Area	Ø Orifice	Non-Return Valve	Thread
[mm]	[mm]	[mm]	[m²]	[mm]		
40	253\218	20	0,037	6	Optional	R¾ ET

Operating Conditions

Air Flow	Max. overload/ maintenance airflow rate	Operating Temperature	Mode	Application
[m_N^3 / h]	[m_N^3 / h]	[°C]		
2 - 6	10	5 - 80	continuous / intermittent	residential wastewater



Applications

- Wastewater treatment plants (municipal & industrial)
- Aeration tanks
- Activated sludge systems
- SBR (Sequencing Batch Reactors)
- MBR (Membrane Bioreactors)
- Equalization basins
- Fish farming & aquaculture
- Oxygenation for aerobic digestion
- Leachate treatment systems